

LMC555 CMOS Timer


General Description

The LMC555 is a CMOS version of the industry standard 555 series general purpose timers. It offers the same capability of generating accurate time delays and frequencies but with much lower power dissipation and supply current spikes. When operated as a one-shot, the time delay is precisely controlled by a single external resistor and capacitor. In the astable mode the oscillation frequency and duty cycle are accurately set by two external resistors and one capacitor. The use of National Semiconductor's LCMOSTM process extends both the frequency range and low supply capability.

Features

- Less than 1 mW typical power dissipation at 5V supply
- 3 MHz astable frequency capability
- 1.5V supply operating voltage guaranteed
- Output fully compatible with TTL and CMOS logic at 5V supply
- Tested to -10 mA, +50 mA output current levels
- Reduced supply current spikes during output transitions
- Extremely low reset, trigger, and threshold currents
- Excellent temperature stability
- Pin-for-pin compatible with 555 series of timers

Block and Connection Diagrams

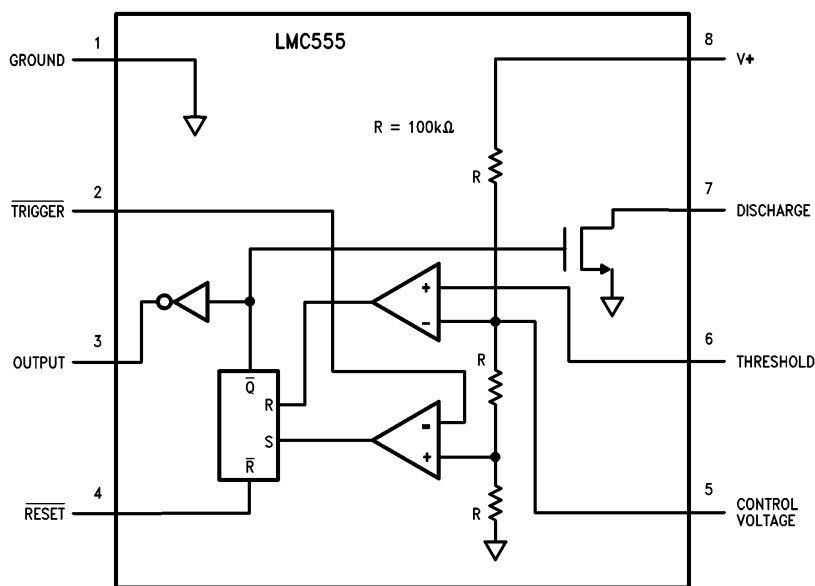

TL/H/8669-1

(Pinouts for Molded and Metal Can Packages are identical)

Order Number LMC555CH, LMC555CM or LMC555CN
See NS Package Number H08C, M08A or N08E

LMCMOSTM is a trademark of National Semiconductor Corp.

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage, V _S	15V
Input Voltages, V ₂ , V ₄ , V ₅ , V ₆	−0.3V to V _S + 0.3V
Output Voltages, V ₃ , V ₇	15V
Output Current I ₃ , I ₇	100 mA
Operating Temperature Range (Note 1)	−40°C to +85°C*
Storage Temperature Range	−65°C to +150°C

Soldering Information

Dual-In-Line Package	
Soldering (10 seconds)	260°C
Small Outline Package	
Vapor Phase (60 seconds)	215°C
Infrared (15 seconds)	220°C

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.

Electrical Characteristics


Test Circuit, T = 25°C, all switches open, $\overline{\text{RESET}}$ to V_S unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units (Limits)
I ₈	Supply Current	V _S = 1.5V V _S = 5V V _S = 12V		50 100 150	150 250 400	μA
V ₅	Control Voltage	V _S = 1.5V V _S = 5V V _S = 12V	0.8 2.9 7.4	1.0 3.3 8.0	1.2 3.8 8.6	V
V ₇	Discharge Saturation Voltage	V _S = 1.5V, I ₇ = 1 mA V _S = 5V, I ₇ = 10 mA		75 150	150 300	mV
V _{3L}	Output Voltage (Low)	V _S = 1.5V, I ₃ = 1 mA V _S = 5V, I ₃ = 8 mA V _S = 12V, I ₃ = 50 mA		0.2 0.3 1.0	0.4 0.6 2.0	V
V _{3H}	Output Voltage (High)	V _S = 1.5V, I ₃ = −0.25 mA V _S = 5V, I ₃ = −2 mA V _S = 12V, I ₃ = −10 mA	1.0 4.4 10.5	1.25 4.7 11.3		V
V ₂	Trigger Voltage	V _S = 1.5V V _S = 12V	0.4 3.7	0.5 4.0	0.6 4.3	V
I ₂	Trigger Current	V _S = 5V		10		pA
V ₄	Reset Voltage	V _S = 1.5V (Note 2) V _S = 12V	0.4 0.4	0.7 0.75	1.0 1.1	V
I ₄	Reset Current	V _S = 5V		10		pA
I ₆	Threshold Current	V _S = 5V		10		pA
I ₇	Discharge Leakage	V _S = 12V		1.0	100	nA
t	Timing Accuracy	SW 2, 4 Closed V _S = 1.5V V _S = 5V V _S = 12V	0.9 1.0 1.0	1.1 1.1 1.1	1.25 1.20 1.25	ms
Δt/ΔV _S	Timing Shift with Supply	V _S = 5V ± 1V		0.3		%/V
Δt/ΔT	Timing Shift with Temperature	V _S = 5V −40°C ≤ T ≤ +85°C		75		ppm/°C
f _A	Astable Frequency	SW 1, 3 Closed V _S = 12V	4.0	4.8	5.6	kHz
f _{MAX}	Maximum Frequency	Max. Freq. Test Circuit, V _S = 5V		3.0		MHz
t _R , t _F	Output Rise and Fall Times	Max. Freq. Test Circuit V _S = 5V, C _L = 10 pF		15		ns
t _{PD}	Trigger Propagation Delay	V _S = 5V, Measure Delay from Trigger to Output		100		ns


* Refer to RETSC555X drawing for specifications of military LMC555H version.

Note 1: For operation at elevated temperatures, the device must be derated based on a 150°C maximum junction temperature and a thermal resistance of 111°C/W for the LMC555CN, 167°C/W for the LMC555CH, and 169°C/W for the LMC555CM. Maximum allowable dissipation at 25°C is 1126 mW for the LMC555CN, 755 mW for the LMC555CH, and 740 mW for the LMC555CM.

Note 2: If the $\overline{\text{RESET}}$ pin is to be used at temperatures of −20°C and below V_S is required to be 2.0V or greater.

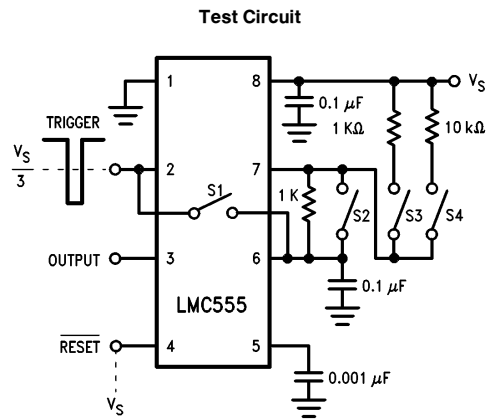


TL/H/8669-2

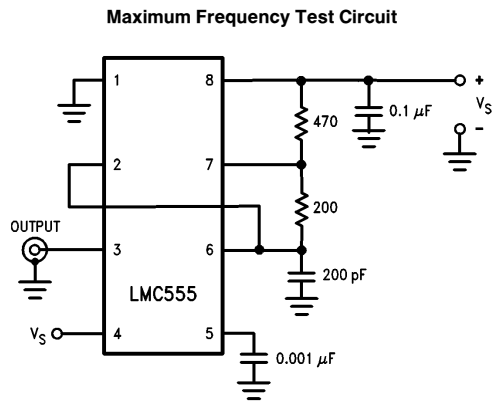


TL/H/8669-3

Typical Applications

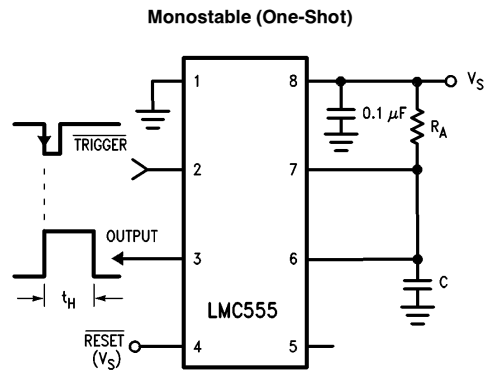

TL/H/8669-4


$t_H = 1.1 R_A C$ (Gives time that output is high following trigger)
 RESET overrides TRIGGER, which can override THRESHOLD. Therefore, the trigger pulse must be shorter than the desired t_H .
 The minimum trigger pulse width is 20 ns.
 The minimum reset pulse width is 400 ns.

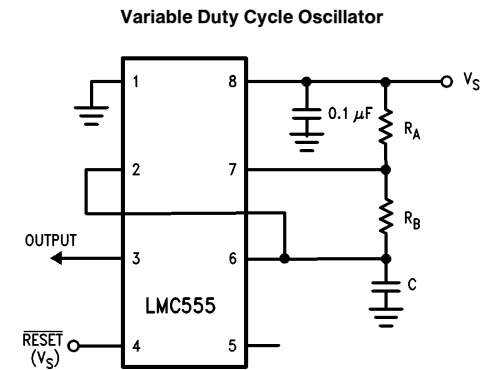

TL/H/8669-5


$$f_{osc} = \frac{1.44}{(R_A + 2R_B)C}$$

$$\text{Duty Cycle} = \frac{R_B}{R_A + 2R_B} \quad (\text{Gives fraction of total period that output is low})$$

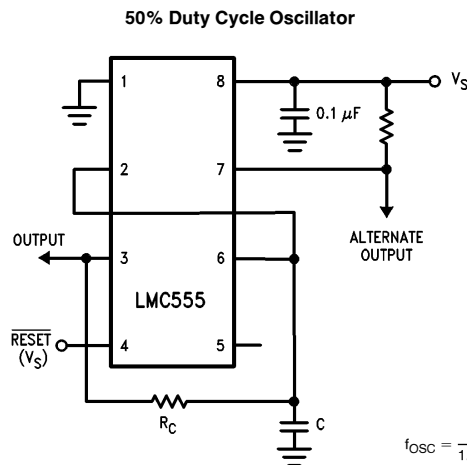


$$f_{osc} = \frac{1}{1.4R_C C}$$


TL/H/8669-6



Physical Dimensions inches (millimeters) unless otherwise noted

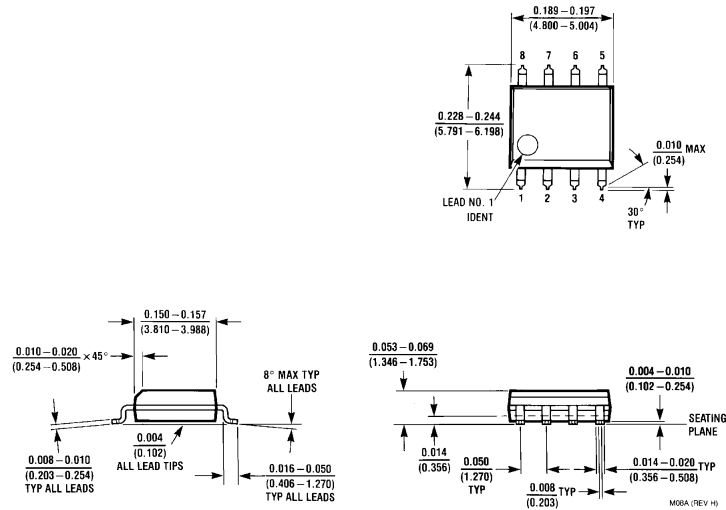


Molded Small Outline (SO) Package (M)
Order Number LMC555CM
NS Package Number M08A

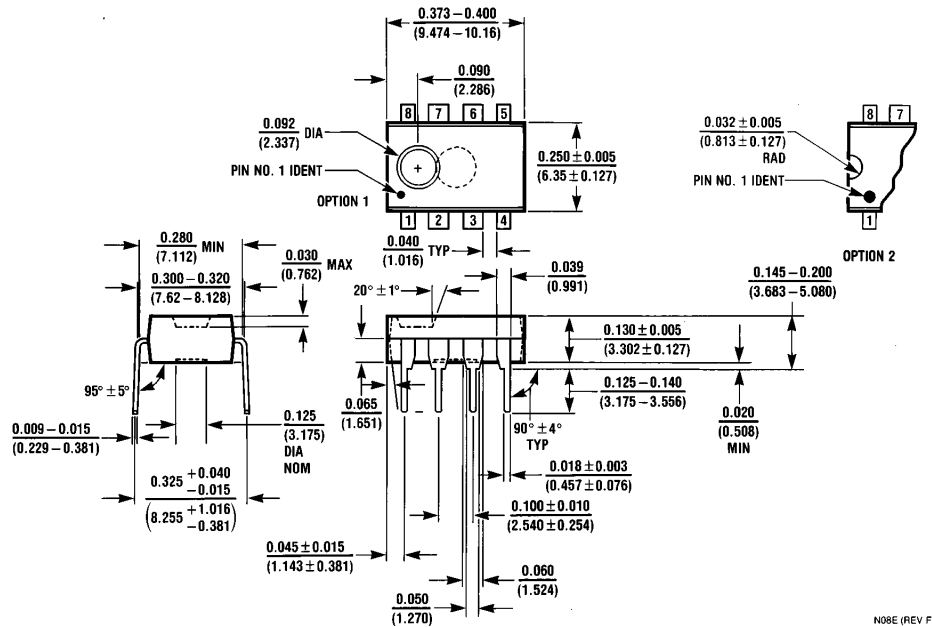

Molded Dual-in-line Package (N)
Order Number LMC555CN
NS Package Number N08E

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

Lit. # 108445

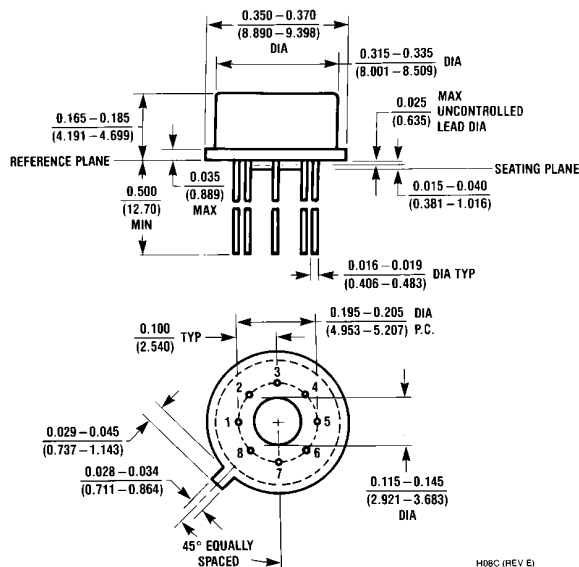

8-Lead TO-5 Metal Can Package (H)
Order Number LMC555CH
NS Package Number H08C

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

<http://www.national.com>

National Semiconductor Europe

Fax: +49 (0) 180-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 180-530 85 85
 English Tel: +49 (0) 180-532 78 32
 Français Tel: +49 (0) 180-532 93 58
 Italiano Tel: +49 (0) 180-534 16 80

National Semiconductor Hong Kong Ltd.

19th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.

Tel: 81-043-299-2308
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.