

D-Sub /
D-Sub cover /
Centronics

Multiflex -
DIN 41651

Modular

USB
IEEE 1394

Switches

Powerinlets
Poweroutlets

DIN 41612
DIN 41617
Hard Metric

MiniDIN


Pin header
Female header
Sockets / Jumper

Terminal Blocks

Memory Card
connectors

FFC / FPC

Micro -
Miniature

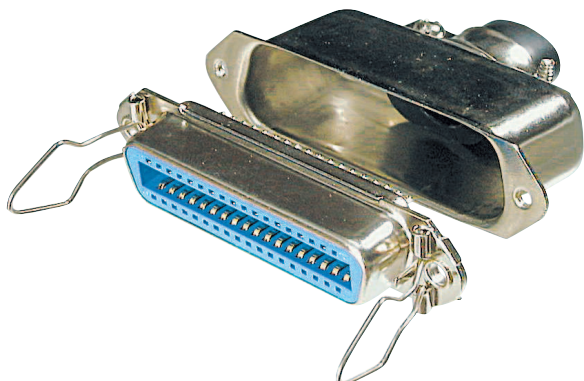

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontaktoberfläche
Ni, Au / Sn

Kontaktwiderstand
20mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
1A

Betriebstemperatur
-40°C - +105°C

Betriebsspannung
250V AC

Prüfspannung
1000V AC

Verpackung
Blisterverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au / Sn

Contact resistance
20mΩ max

Insulation resistance
1000MΩ min

Current rating
1A

Operating temperature
-40°C - +105°C


Operating voltage
250V AC

Test voltage
1000V AC

Packing
Tray packing

Dimensions				
No. of Contacts	A	B	C	D
36	36.72	48.90	59.70	67.70
50	51.84	64.10	74.90	82.80

Dimensions				
No. of contacts	E	F	G	H
36	52.80	23.00	33.10	11.5
50	68.00	25.00	35.50	12.5

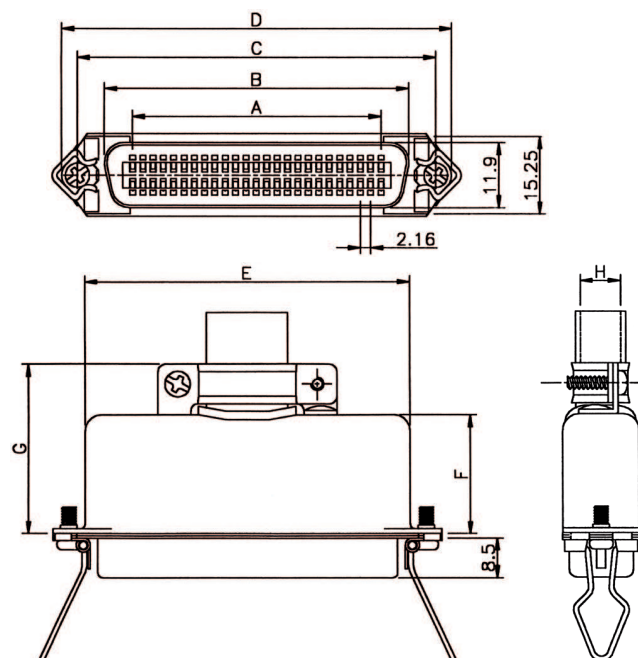

Bestellcode / Ordercode

Polzahl

No. of contacts

36 / 50

36 / 50

F-B - Buchse

F-B - Female

A - 57 - xx - F-B

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option