


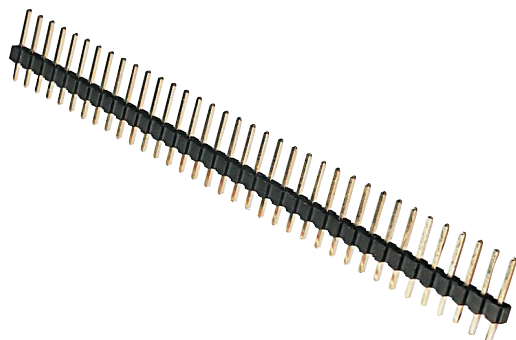

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontaktoberfläche
Ni, Au or Sn

Kontaktwiderstand
20mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
3,0A

Betriebstemperatur
-40°C - +105°C

Betriebsspannung
250V AC

Prüfspannung
500V AC

Verpackung
Kunststoffbeutelverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au or Sn

Contact resistance
20mΩ max

Insulation resistance
1000MΩ min



Current rating
3.0A

Operating temperature
-40°C - +105°C

Operating voltage
250V AC

Test voltage
500V AC

Packing
Polybag packing

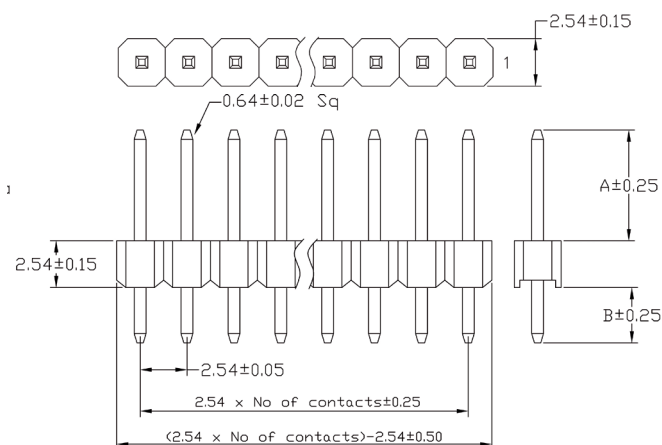

Bestellcode / Ordercode

Kontaktoberfläche
G - Gold Flash
Z - Zinn

Plating
G - Gold flash
Z - Tin

Polzahl
02 - 40

No. of contacts
02 - 40

Stiftlänge
D - 11,2mm (A=5,66; B=3,00)
A - 12,4mm (A=6,08; B=3,78)
B - 11,6mm (A=6,06; B=3,00)
C1 - 13,6mm (A=8,75; B=2,31)
C2 - 13,6mm (A=6,08; B=4,98)
E - 21,1mm (A=12,6; B=5,96)
F - 9,2mm (A=3,66; B=3,00)

Pin length
D - 11.2mm (A=5.66; B=3.00)
A - 12.4mm (A=6.08; B=3.78)
B - 11.6mm (A=6.06; B=3.00)
C1 - 13.6mm (A=8.75; B=2.31)
C2 - 13.6mm (A=6.08; B=4.98)
E - 21.1mm (A=12.6; B=5.96)
F - 9.2mm (A=3.66; B=3.00)

AW **140** **E** - **G** **x** - **xx** **x**

Bitte „x“ durch die geeignete Option ersetzen
 Please replace „x“ with appropriate option