


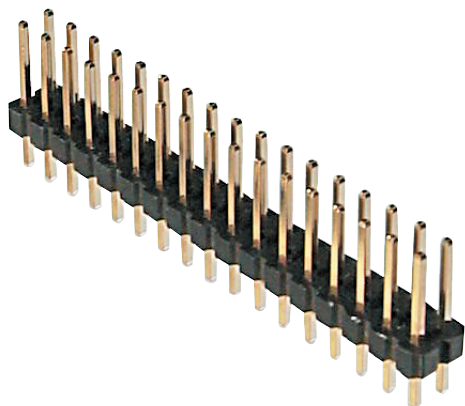

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontaktoberfläche
Ni, Au oder Sn

Kontaktwiderstand
20mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
3,0A

Betriebstemperatur
-40°C - +105°C

Betriebsspannung
250V AC

Prüfspannung
1000V AC

Verpackung
Kunststoffbeutelverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au or Sn

Contact resistance
20mΩ max

Insulation resistance
1000MΩ min



Current rating
3.0A

Operating temperature
-40°C - +105°C

Operating voltage
250V AC

Test voltage
1000V AC

Packing
Polybag packing

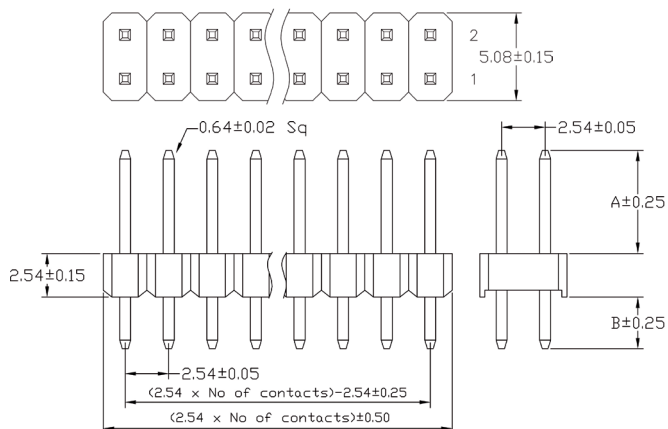

Bestellcode / Ordercode

Kontaktoberfläche
G - Gold Flash
Z - Zinn

Polzahl
04 - 80

Stiftlänge
D - A=6mm, B=3mm
A - A=7mm, B=3mm

Plating
G - Gold flash
Z - Tin

No. of contacts
04 - 80

Pin length
D - A=6mm, B=3mm
A - A=7mm, B=3mm

AWL254 - **D** **G** - **x** **xx** **x**

Bitte „x“ durch die geeignete Option ersetzen
 Please replace „x“ with appropriate option