


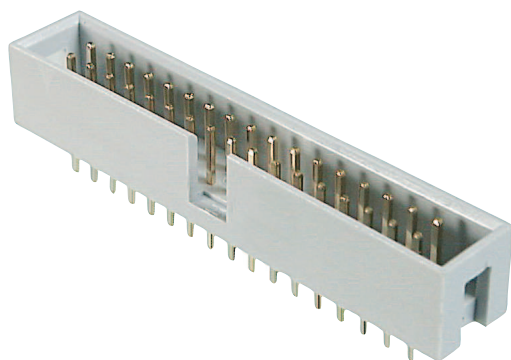

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontaktoberfläche
Ni, Au / Sn

Kontaktwiderstand
20mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
3A

Betriebstemperatur
-40°C - +105°C

Betriebsspannung
250V AC

Prüfspannung
1000V AC

Verpackung
Blisterverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au / Sn

Contact resistance
20mΩ max

Insulation resistance
1000mΩ min

Current rating
3A



Operating temperature
-40°C to +105°C

Operating voltage
250V AC

Test voltage
1000V AC

Packing
Tray packing

Dimensions		
No. of contacts	A	B
10	10.16	20.32
14	15.24	25.40
16	17.78	27.94
20	22.86	33.02
26	30.48	40.64
34	40.64	50.80
40	48.26	58.42
50	60.96	71.12
60	73.66	83.82
64	78.74	88.90

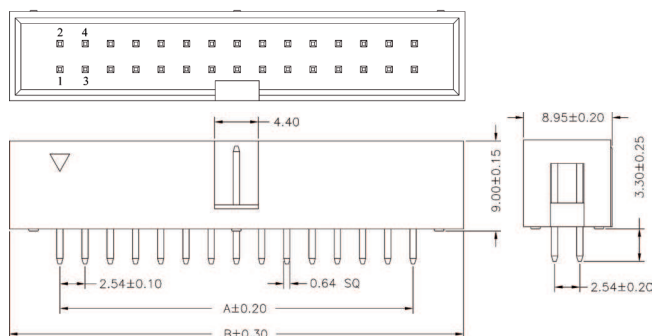

Bestellcode / Ordercode

Polzahl

10 / 14 / 16 / 20 /
26 / 34 / 40 / 50 / 60 / 64

Beschichtung

5 - vollverzinkt
2 - Gold flash (selectiv)

No. of contacts

10 / 14 / 16 / 20 /
26 / 34 / 40 / 50 / 60 / 64

Plating

5 - Tinned
2 - Gold flash (selective)

AWHW **xx** **G** **0** **x** **0** **2** **-** **T**

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option