



1



2



3



4



5



6




7



8



9

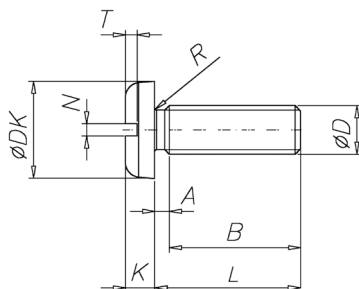

Maße in mm

D	M2,5	M3	M3,5	M4	M5	M6	M8
P ¹⁾	0,45	0,5	0,6	0,7	0,8	1	1,25
DK	5	6	7	8	10	12	16
K	1,5	1,8	2,1	2,4	3	3,6	4,8
N	0,6	0,8	1	1,2	1,2	1,6	2
T min	0,6	0,7	0,8	1	1,2	1,4	1,9

¹⁾ Gewindesteigung

VPE

L \ D	M2,5	M3	M3,5	M4	M5	M6	M8
4	—	2000	—	—	—	—	—
5	—	2000	2000	2000	—	—	—
6	2000	2000	2000	2000	1000	—	—
8	2000	2000	2000	2000	1000	1000	—
10	2000	2000	2000	2000	1000	1000	200
12	2000	2000	—	2000	1000	1000	200
14	—	2000	—	2000	1000	—	—
16	2000	2000	2000	2000	1000	1000	200
18	—	2000	—	2000	1000	500	—
20	—	2000	2000	2000	1000	500	200
25	—	2000	—	1000	1000	500	200
30	—	2000	—	1000	500	500	200
35	—	2000	—	1000	500	500	200
40	—	1000	—	1000	500	500	200
45	—	1000	—	1000	500	200	100
50	—	1000	—	500	500	200	100
60	—	—	—	500	200	200	100
70	—	—	—	—	200	200	100
80	—	—	—	—	200	100	100
100	—	—	—	—	—	100	—

Die handelsüblichen Größen sind durch Angabe der VPE gekennzeichnet.

Lagerhaltig in Güte: 4.8, Messing, Polyamid sowie Edelstahl A2 und Edelstahl A4

