



1



2



3



4



5



6



7




8



9

Maße in mm

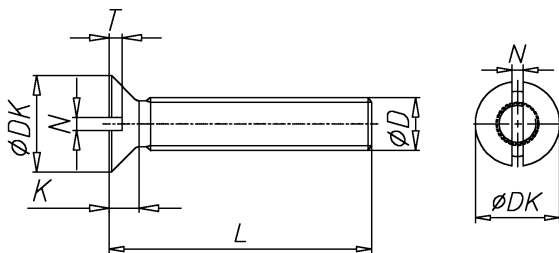

D	M2	M2,5	M3	M3,5	M4	M5	M6	M8	M10	M12
P ¹⁾	0,4	0,45	0,5	0,6	0,7	0,8	1	1,25	1,5	1,75
DK	3,8	4,7	5,6	6,5	7,5	9,2	11	14,5	18	22
K	1,2	1,5	1,65	1,93	2,2	2,5	3	4	5	6
N	0,5	0,6	0,8	0,8	1	1,2	1,6	2	2,5	3
T min	0,4	0,5	0,6	0,7	0,8	1	1,2	1,6	2	2,4

¹⁾ Gewindesteigung

VPE

L \ D	M2	M2,5	M3	M3,5	M4	M5	M6	M8	M10	M12
4	2000	2000	2000	—	—	—	—	—	—	—
5	2000	2000	2000	—	2000	—	—	—	—	—
6	2000	2000	2000	2000	2000	1000	—	—	—	—
8	2000	2000	2000	2000	2000	1000	1000	—	—	—
10	2000	2000	2000	2000	2000	1000	1000	200	—	—
12	2000	2000	2000	2000	2000	1000	1000	200	—	—
14	—	2000	2000	—	2000	1000	1000	200	—	—
16	2000	2000	2000	2000	2000	1000	1000	200	100	—
18	2000	2000	2000	—	2000	1000	500	—	100	—
20	2000	2000	2000	2000	2000	1000	500	200	100	100
22	—	—	2000	—	1000	—	—	—	100	—
25	2000	2000	2000	2000	1000	1000	500	200	100	100
28	—	—	2000	—	1000	—	—	—	—	—
30	—	2000	2000	1000	1000	500	500	200	100	100
35	—	—	2000	—	1000	500	500	200	100	100
40	—	—	1000	—	1000	500	500	200	100	100
45	—	—	1000	—	1000	500	200	100	100	100
50	—	—	1000	—	500	500	200	100	100	100
55	—	—	—	—	500	200	200	100	—	—
60	—	—	500	—	500	200	200	100	100	100
65	—	—	—	—	—	200	200	100	100	—
70	—	—	—	—	—	200	200	100	100	100
80	—	—	—	—	—	200	200	100	100	100
90	—	—	—	—	—	200	200	100	100	100
100	—	—	—	—	—	200	200	100	100	100

Die handelsüblichen Größen sind durch Angabe der VPE gekennzeichnet.

Lagerhaltig in Güte: 4.8, Messing, Polyamid sowie Edelstahl A2 und Edelstahl A4

1



2



3



4



5



6



7



8



9

