





P&Q Curve

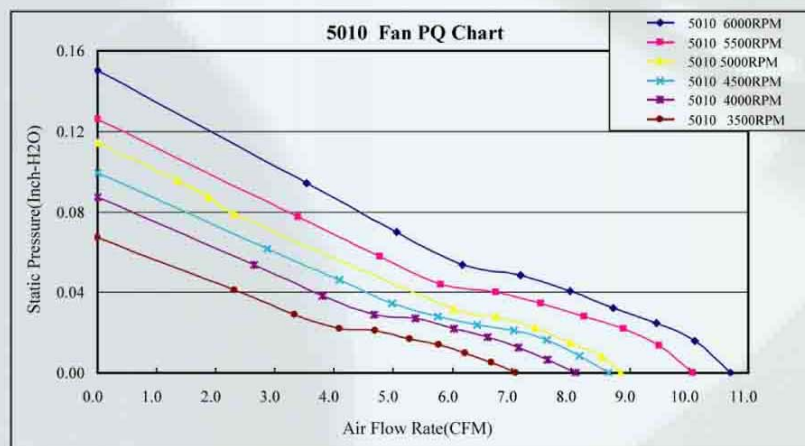

Dimensions Drawing

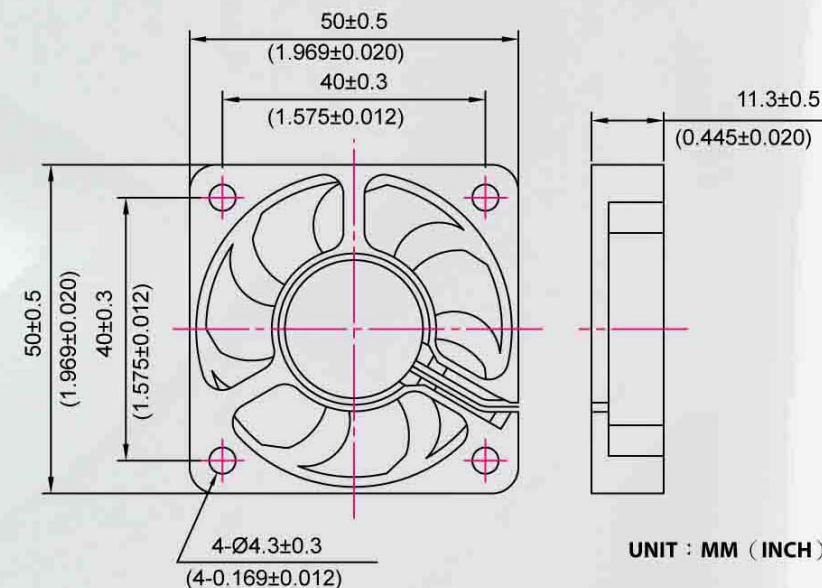

Specifications

- Material : impeller & Frame : Plastic(UL 94V-0)
- Lead Wires :
UL 1007 AWG#26 Or Equivalent
Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- Function type is optional
- The max air flow and the speed are measured in free air;
max air pressure is measured at zero air flow
- Noise is measured in anechoic chamber in free air, one meter from intake side
- All readings are typical values at rated voltage
- Specifications are subject to change with notice
- Additional special function may be added according to the requirement of customer

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)
TFD-5010TH05X	5	0.28	1.4	6000	10.71	0.15	<29
TFD-5010HH05X	5	0.25	1.25	5500	10.07	0.13	<27
TFD-5010H05X	5	0.22	1.1	5000	8.84	0.11	<25
TFD-5010M05X	5	0.19	0.95	4500	8.63	0.1	<23
TFD-5010L05X	5	0.16	0.8	4000	8.08	0.09	<20
TFD-5010TH12X	12	0.16	1.92	6000	10.71	0.15	<29
TFD-5010HH12X	12	0.14	1.56	5500	10.07	0.13	<27
TFD-5010H12X	12	0.12	1.44	5000	8.84	0.11	<25
TFD-5010M12X	12	0.09	1.08	4500	8.63	0.1	<23
TFD-5010L12X	12	0.07	0.84	4000	8.08	0.09	<20
TFD-5010LL12X	12	0.06	0.72	3500	7.07	0.07	<17.26