



REVISTONS			
REV	DATE	DESCRIPTIONS	APPRO.BY

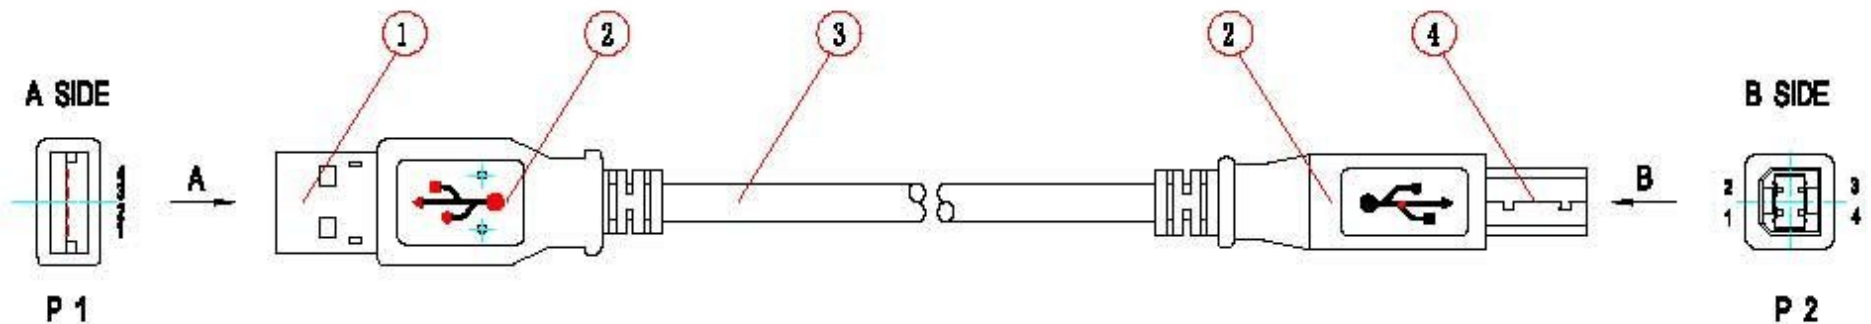

WIRING DIAGRAM

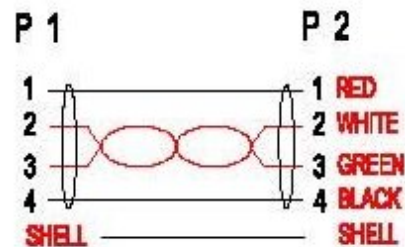

GREY

EFB NO:	Length
K5255.0,5	0.5m
K5255.1	1.0m
K5255.1,5	1.5m
K5255.1,8	1.8m
K5255.2,9	2.9m
K5255.3	3.0m
K5255.5	5.0m

NOTE:

1. ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE IS NOT PERMITTED
2. KEEP CLEAN
- 3.PRINTING:AWM 80 °C 30V VW-1 28AWGx1P 24AWGx2C USB2.0 HIGHSPEED CABLE
- 4.ROHS COMPLIANT

4	CONN	USB B TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
3	CABLE	28AWG TXR*1P+24AWG TXR*2C+AL+B(COVERAGE RATE IN 85%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.1mm	
2	OVERMOLD	PVC COLOR:GREY	10g
1	CONN	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
NO.	MAT.NANE	DESCRIPTION	QTY

CUSTOMER'S ITEM		K5266.X	CUSTOMER		EFB
DRAWING			TITLE		USB CABLE
UNIT	mm	SCALE	1:1	REV	
DRAWN BY		CHECK BY	APPRO BY		DATE
					2288-04-05-2008

